


LAMPSONE

4" IC/NON-IC LED FIRE RATED HOUSING NEW CONSTRUCTION RECESSED CAN

SKU: **A4/LED/FR**

DESCRIPTION

A4/LED/FR is designed for new construction installations and suitable for use in ceiling where the housing can be in direct contact with insulation. Air tight construction reduces energy costs by reducing the amount of air leakages through the ceiling. Fire box 2 hours fire rated.

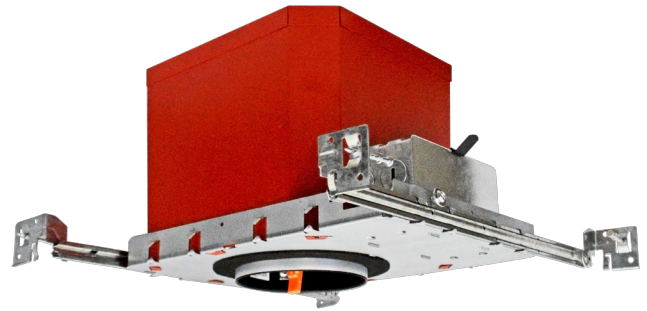

PLASTER FRAME

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

HOUSING


- Die formed 22 gauge galvanized steel construction. Housing interior is comprised of a flexible non-combustible insulation.

JUNCTION BOX

- Listed for through branch circuit wiring.
- Contains one 1-1/8", one 1/2", three 7/8" knockouts and four Romex pryouts with strain relief.

BAR HANGER

- Pre-installed Real nail easily install in regular lumber, engineered lumber.
- Swivel bar hanger which is bendable at 90 degree angle will help to install more easily.
- Bar Hangers are adjustable from 13 - 5/8" to 25" and can be repositioned 90 degree on plaster frame.

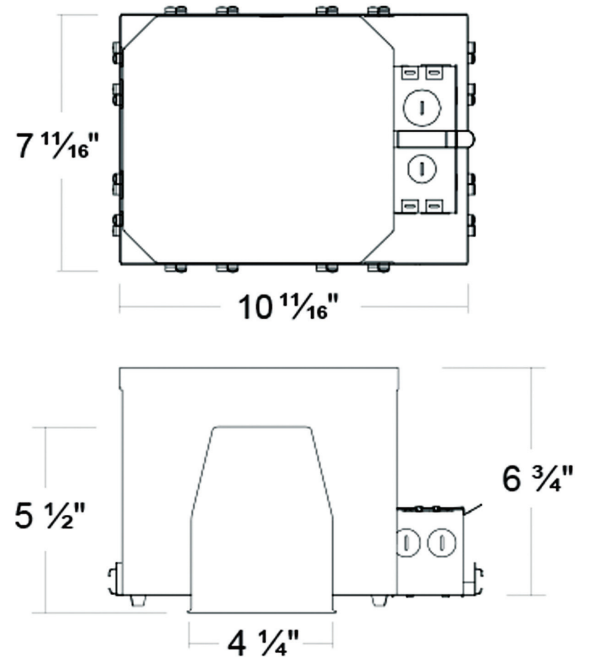

LISTINGS

- cULus Listed for Damp Location
- cULus Listed for Wet Location (with specified trims)
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction



Project:	
Contact:	
Location:	
Fixture Type:	

Quantity	Notes