

5" IC LED REMODELING RECESSED CAN SPECIFICATION SHEET

SKU: A5/LED/IC/R/AT

A5/LED/IC/R/AT is designed for remodel applications and suitable for use in ceiling where the housing can be direct contact with insulation. Remodel housing install into existing drywall or wood ceiling with no above access. Air tight construction reduces energy costs by reducing the amount of air leakage through the ceiling.

JUNCTION BOX

- Listed for through branch circuit wiring.
- Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief.

CEILING THICKNESS



- Housing adjusts from 5/8"-1 3/8" to accommodate various ceiling thickness.

REMODEL CLIPS

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

LISTINGS

- cULus Listed for Feed Through
- cULus Listed for Damp Location
- Certified under ASTM-E283 for Air tight construction

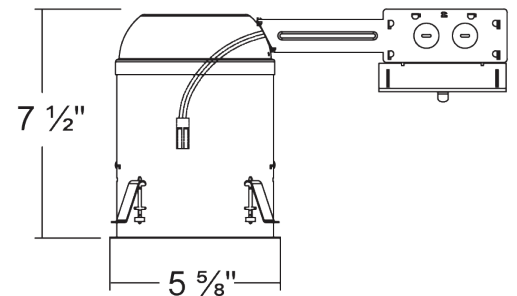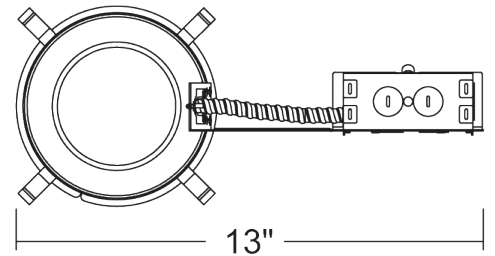

Project:	
Contact:	
Location:	
Fixture Type:	

Quantity	Notes